

C Series
Resistance Input, Resistance Output
Isolated Safety Barrier

→ Introductions

This isolated safety barrier converts the resistance signals to 1:1 resistance signals.
The input, output, and power supply are galvanically isolated from each other. It can be interfaced with all kinds of device, such as DCS, PLC and other systems.

→ Parameters

Power supply:
Connection type: Terminals (14+, 15-) or DIN rail connector
Rated voltage: 18 V DC ~ 60 V DC (Recommended voltage: 24 V DC)

Input (1, 2, 3; 4, 5, 6):
Input signal: 2/3-wire resistance signal
Signal range: 18 Ω ~ 400 Ω

Line resistance: ≤ 20 Ω per line

Output (7, 8, 9; 10, 11, 12):
Output signal: 1:1 input resistance signal
Output drive current: 0.1 ~ 10 mA

Transmission characteristics:

Output drive current	Accuracy
0.5 ~ 10 mA	± 0.1% F.S. or < 0.2 Ω (Choose the maximum value)

NOTE: The transmission accuracy of resistance decreases with the decrease of drive current.


Response time: ≤ 0.5 s

Temperature drift: 30 ppm/°C

Electromagnetic compatibility: Accordance to IEC 61326-3-1

Strength (1 mA leakage current, 1 minute test)

Nanjing New Power Electronic

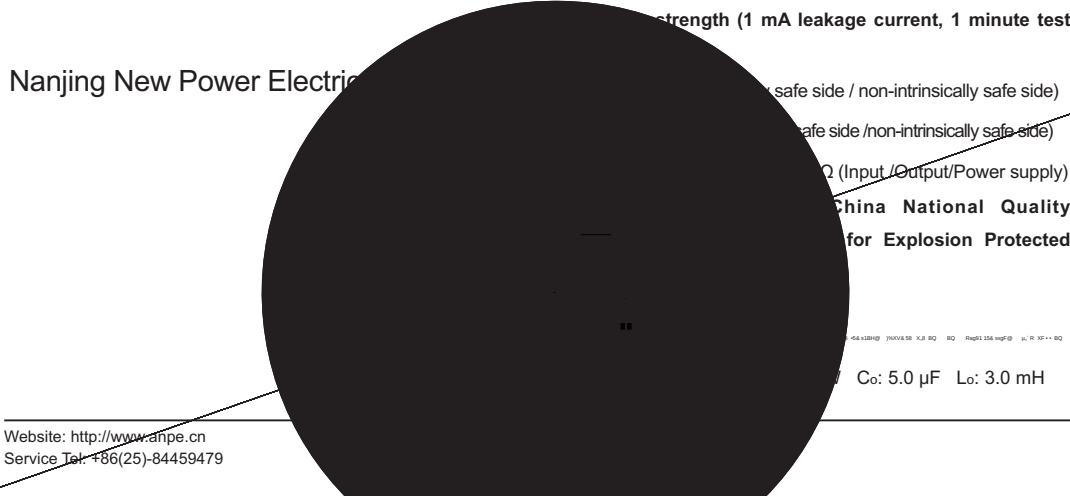

Ambient conditions:


Operation temperature: -20 °C ~ +60 °C
Relative humidity: 10% RH ~ 90% RH (40 °C)
Atmosphere pressure: 80 kPa ~ 106 kPa
Storage temperature: -40 °C ~ +80 °C

Power dissipation: 0.4 W

→ Support model type

Model number		Output1	Output2	Power supply	
		1:1 resistance signal	1:1 resistance signal	Terminals	DIN rail
Single input, single output	NPEXA-C27	■		■	
	NPEXA-C27PB	■		■	■
Single input, double output	NPEXA-C277	■	■	■	
	NPEXA-C277PB	■	■	■	■
Double input, double output	NPEXA-C2D77	■	■	■	
	NPEXA-C2D77PB	■	■	■	■

→ Wiring diagram

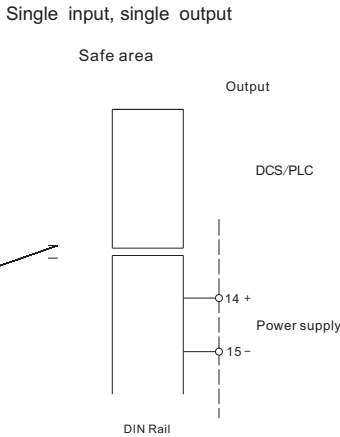

Co: 5.0 μF Lo: 3.0 mH

