

C Series Single Channel Resistance Transmitter

→ Introductions

This resistance transmitter converts the resistance current or voltage signals. The input, output, and power supply are galvanically isolated from each other. The power supply function can be selected in ordering. This product is designed intelligently and has many features that traditional products do not have. It has automatic adjustment, potentiometer free, automatic zero, and other advanced technologies. It can be interfaced with various kinds of device, such as DCS, PLC and other systems.

→ Parameters

Power supply:

Connection type: Terminals (9+, 10-) or DIN rail
Rated voltage: 18 V DC ~ 60 V DC (Recommended: 24 V DC)

Input (1, 2, 3): 2/3-wire resistance signal
Please see the product label for details.

Line resistance: ≤ 20 Ω per line

Output (5, 6; 7, 8):

Output current: 0(4) ~ 20 mA; 0 ~ 10 mA
Output voltage: 0(1) ~ 5 V; 0 ~ 10 V
Load resistance: 0(4) ~ 20 mA: ≤ 550 Ω; 0 ~ 10 mA: ≥ 1 kΩ
0(1) ~ 5 V: ≥ 1 MΩ; 0 ~ 10 V: ≥ 10 kΩ

Transmission characteristics:

Accuracy: ± 0.1% F.S. (25 °C ± 2 °C)

Response time: ≤ 0.5 s

Temperature drift: 30 ppm/°C

Electromagnetic compatibility: According to GB 61326-3-1

Dielectric strength (1 mA leakage current, 1 minute test time):

≥ 1500 V AC (Input /Output/Power supply)

Insulation resistance: ≥ 100 MΩ (Input /Output/Power supply)


Ambient conditions:

Operation temperature: -20 °C ~ +60 °C
Relative humidity: 10% RH ~ 90% RH (40 °C)
Atmosphere pressure: 80 kPa ~ 106 kPa
Storage temperature: -40 °C ~ +80 °C

Power dissipation:


0.8 W (24 V DC, single output)
1.2 W (24 V DC, double output)

double output

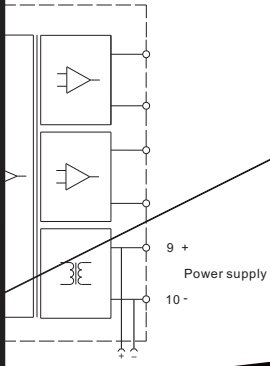

Nanjing New Power Electric Co., Ltd.

BUS	Electrical Characteristics
Current	Max. 8 A
Voltage (UL/IEC)	1.6 kV
Operation temperature	-40 °C ~ +105 °C



C. Pry the metal lock off the rail with screwdriver as arrow shown, pull downward the springs, and rotate the device.

D. Remove the device as arrow shows.

- As far as possible to mount it vertically, In order to dissipation the heat of the apparatus.

Vertically installation