

NPEXA-H61P2

Single input, single output

NPEXA-H611P2

Single input, double output


Input: Frequency

Output: 4 ~ 20 mA


This isolated safety barrier converts the frequency signals from a hazardous area into current or voltage signals to a safe area by isolation. The input, output, and power supply are galvanically isolated from each other. A self-test feature is also available on this device. You can use PC or handheld programmer to modify parameters.

Technical data

Power supply:	18 V DC~32 V DC (Reverse power protection)
Power dissipation:	0.8 W (24V DC, single output) 1.8 W (24V DC, double output)
Input signal:	Frequency Max. Input voltage: 30V Min. Input amplitude: 2V Frequency range: 0.1Hz~100kHz PNP/NPN Distribution voltage: 12V Current: ≤ 20mA Frequency range: 0.1Hz~10kHz NAMUR switch Distribution voltage: approx.8.2V Short-circuit current: approx.8mA Frequency range: 0.1Hz~10kHz
Output signal:	4 ~ 20 mA
Load resistance:	$R_L \leq 500 \Omega$
Accuracy:	$\pm 0.1\%F.S.$
Temperature drift:	$\leq 0.01\%F.S./^{\circ}C$
Response time:	$\leq 500ms$
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	$\geq 2500 V AC$ (intrinsically safe side / non-intrinsically safe side) $\geq 500 V AC$ (Power supply side /non-intrinsically safe side)
Insulation resistance:	$\geq 100 M\Omega$ (Input /Output/Power supply)
Operation temperature:	$-20^{\circ}C \sim +60^{\circ}C$
Storage temperature:	$-40^{\circ}C \sim +80^{\circ}C$
Dimension:	15.8 mm (W) × 121.6 mm (H) × 104.8 mm (D)
Fault states:	Input signal state indicator (red), it is remain bright when input over-range. it is flicker when input breakage.

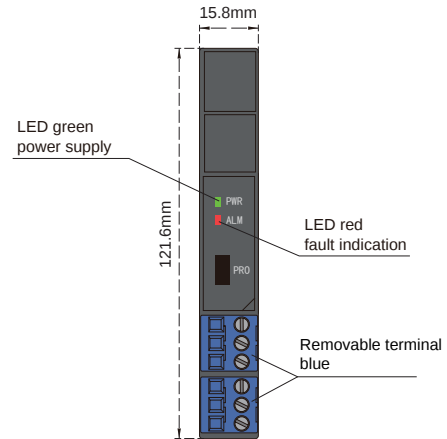

Wiring diagram

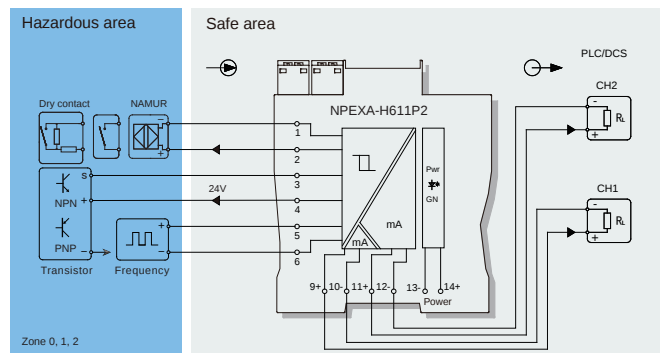

Explosive-proof parameters

National Supervision Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)
Explosive-proof grade: [Ex] [Ga] II C
Um: 250 V
Certified parameters (Terminals 1, 2)
 $U_o=10.5V$, $I_o=13mA$, $P_o=35mW$, $C_o=1.68\mu F$, $L_o=100mH$
Certified parameters (Terminals 5, 6)
 $U_o=10.5V$, $I_o=6mA$, $P_o=16mW$, $C_o=1.68\mu F$, $L_o=700mH$
Certified parameters (Terminals 3, 4, 6)
 $U_o=28V$, $I_o=93mA$, $P_o=651mW$, $C_o=0.08\mu F$, $L_o=4.2mH$

Model rules

NPEXA-H61P2

note1 Output signal

Number	Output
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA