NPEXA-H1D11

Technical data

≤ 500 Ω

compensation range: −20

0.01%F.S./

≤ 1s

≥ 2500 V AC (intrinsically safe side /

≥ 500 V AC (Power supply side /

≥ 100 MΩ (Input /Output/Power supply)

Wiring diagram

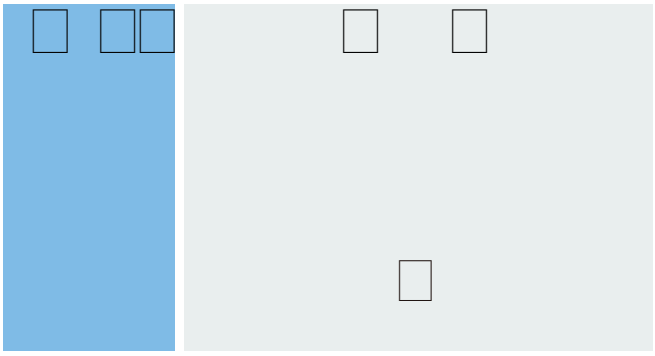

Explosive-proof parameters

Co=12μF

Co=151μF

Co=700μF

Model rules