


TC Temperature Transmitter

NPWD-CD11D.TC

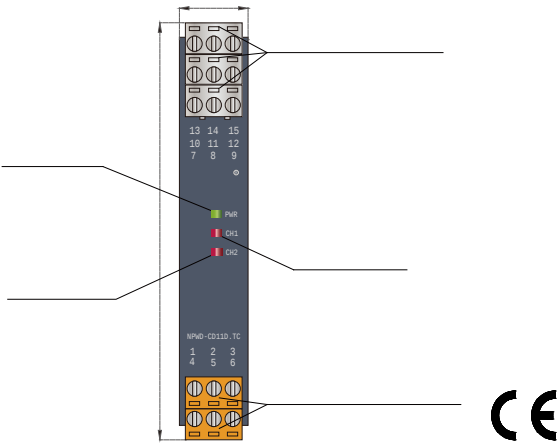

Parameters

$\leq 550\Omega$ $< [(U-3)/0.02]\Omega;$


-20

$\leq 500\text{ ms}$

- $\geq 1500\text{ V AC}$ (Input/Output/Power supply)
- $\geq 100\text{ M}\Omega$ (Input/Output/Power supply)

$(25^{\circ}\text{C}\pm 2^{\circ}\text{C},$

Wiring diagram

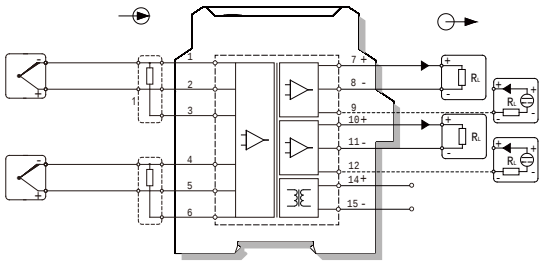

Model rules



Standards	Type	Range	Min.span/Accuracy	
IEC 60584-1			$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
			$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
			$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
			$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
			$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
		-50	500	$\pm 0.5^{\circ}\text{C}; \geq 500$
		-50	500	$\pm 0.5^{\circ}\text{C}; \geq 500$
ASTM E988-96	W5Re-W26Re	$\sim 2315^{\circ}\text{C}$	500	$\pm 0.5^{\circ}\text{C}; \geq 500$
	W3Re-W25Re	$\sim 2315^{\circ}\text{C}$	500	$\pm 0.5^{\circ}\text{C}; \geq 500$
				$\pm 0.3^{\circ}\text{C}; \geq 300$

2	1 ~ 5 V
4	0 ~ 5 V
5	0 ~ 10 V