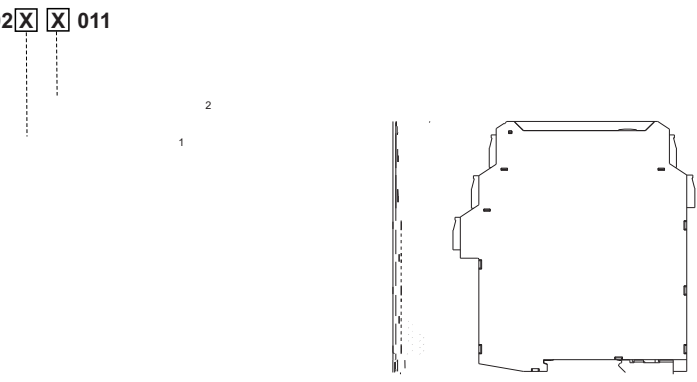


C	→ 简介		→ 外形结构	
	()		× × : 17.8mm×110mm×117mm	
	NPDL- C102 X X 011			
	→ 技术参数		→ 安装	
	供电电源: 18V DC~32V DC (24V DC)		○ DIN IEC 60715 35mm	
	输入(1 2):		○	
	0~1A; 0~2.5A; 0~5A; 0~10A			
	输出(7 8 9):			
	4mA~20mA 0(4)mA~20mA; 0mA~10mA 1~5V; 0~5V; 0~10V			
	负载能力:			
	$R_L \leq [(U-3)/0.024]\Omega; U$ 0(4)mA~20mA: $\leq 550\Omega$; 0mA~10mA: $\leq 1.1k\Omega$ 0(1)V~5V: $\geq 1M\Omega$; 0V~10V: $\geq 2M\Omega$			
	传输精度: 0.2%F.S. (0~120%)			
	输出纹波: $< 16mV_{rms}$ (250 Ω)			
	温度漂移: 0.01%F.S./ $^{\circ}C$			
	频率响应: 40Hz~1kHz			
	响应时间: $< 330ms$			
	过载能力: 2			
	电磁兼容: EMC IEC 61326-3-1			
	介电强度 (漏电流1mA 测试时间1分钟):			
	$\geq 1500 V AC$ (/ /)			
	环境条件:			
	-20 $^{\circ}C$ ~+60 $^{\circ}C$			
	10%RH~90%RH (40 $^{\circ}C$)			
	80kPa~106kPa			
	-40 $^{\circ}C$ ~+80 $^{\circ}C$			
	功耗: $< 1W$			

Nanjing New Power Electric Co., Ltd.

→ 面板显示

○ PWR: ()

→ 注意事项

○

○

○

○

○

○ IEC/EN 60664-1 2