


NPFSR-K122AMD

SQS

2NO+2NC


K

1002

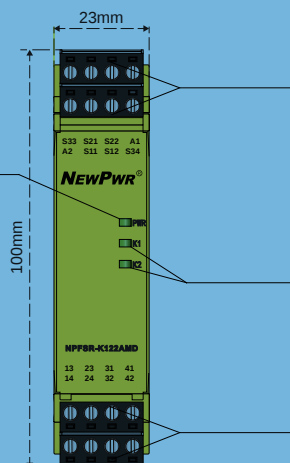

€

24V AC/DC
0.85 ~ 1.1
50Hz ~ 60Hz
≤ 2.2W/24V DC, ≤ 5.4VA/24V AC
≤ 50mA/24V DC
≤ 15Ω
PNP
2NO+2NC
AgSnO ₂ +0.2μmAu
AC-15: 5A/230V, DC-13: 5A/24V
10A gL/gG(NO), 6A gL/gG(NC)
: ≤ 300ms, : ≤ 150ms
: ≤ 30ms, : ≤ 100ms
: ≤ 30ms, : ≤ 100ms
20ms
IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
250V AC
6000V(1.2/50us)
1500V AC, 1 min
IEC 60947-1
10Hz ~ 55Hz, 0.35mm
III
2
IP20
-20°C ~ +60°C
-40°C ~ +80°C
≤ 2000 m
10×10 ⁶ cycles

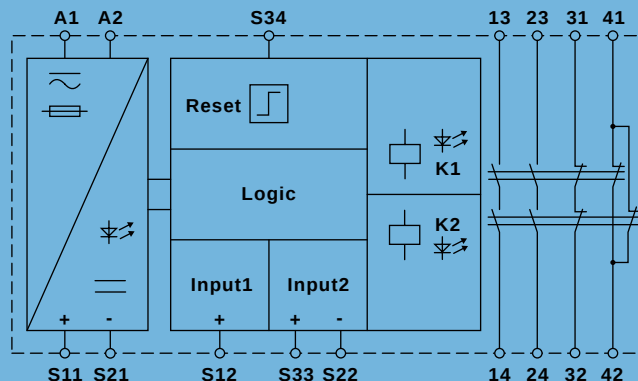

PLe,	ISO 13849
Cat.4,	ISO 13849
20 ,	ISO 13849
99%,	ISO 13849
164 ,	ISO 13849
68,	ISO 13849
SIL3,	IEC 61508
SIL CL3,	IEC 62061
1,	IEC 62061
≥ 99%,	IEC 62061
1.29×10 ⁻⁵ /PTI=20	IEC 62061
1.49×10 ⁻¹⁰ 1/h,	IEC 62061
0,	IEC 60204