


$$\chi^2 \text{NO} + 2\text{NC}$$

K


- 1002

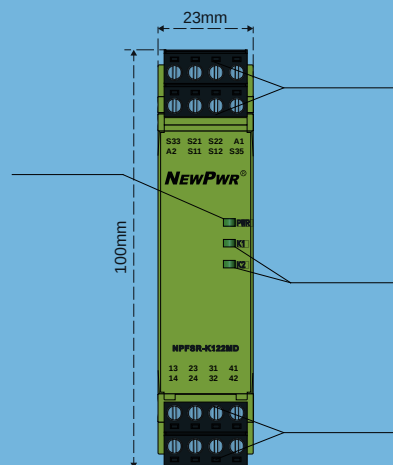

၈၇

$${}^{\prime}\mathbf{H} \quad \vee \quad {}^{\prime\prime}\mathbf{\Omega}$$

ñ ð я	24V AC/DC
ɔ я к Т	0.85 ~ 1.1
г ђ ı	50Hz ~ 60Hz
Ț ı ă	2.2W/24V DC, 5.4VA/24V AC
ʒ ð ђ	50mA/24V DC
М ı ð	
ʒ ı	
Р Ț	2NO+2NC
Р ı ʒ	
Р ɑ	AgSnO ₂
Р к	AC-15: 5A/230V, DC-13: 5A/24V
Р R w 3 ı	10A gL/gG(NO), 6A gL/gG(NC)
т H	
Ѡ H	
Ö ı H	
ɔ ɔ ~ H ʌ Ä	
ɔ Л к	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
ñ ʌ ı ð я	250V AC
ñ ı ă Р ð я	
ʌ ı Ä ŷ	1500V AC, 1 min
ɔ ↔ ɔ к ɔ ˆ	IEC 60947-1
U	10Hz ~ 55Hz, 0.35mm
я ч ı	III
/ ... ч ı	2
ı ч ı	IP20
† Ä □ ŷ	-20°C ~ +60°C
ı è □ ŷ	-40°C ~ +80°C
т ö ŷ	
ı m ı	10×10 ⁶

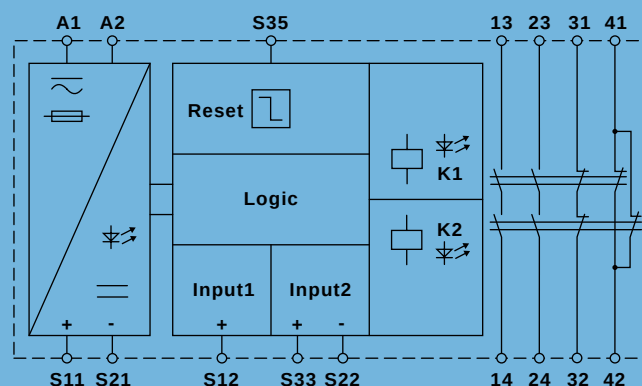 $I \quad \vec{t} \quad \uparrow \quad g_j$  $\bar{G} \simeq V \cap \Omega$

ó ħ ı ı	PLe,	ISO 13849
Ĝ ı ı	Cat.4,	ISO 13849
γ η Ĥ	20 ,	ISO 13849
W z Ā ~ '	99%,	ISO 13849
W z η , Ǿ Ĥ	164 ,	ISO 13849
H ı , Ǿ	68,	ISO 13849
Ĝ ı Ĥ Ǿ ó ı ı	SIL3,	IEC 61508
φ " Ĝ ı Ĥ Ǿ ó ı ı	SIL CL3,	IEC 62061
ı ı Ǿ ŷ	1,	IEC 62061
Ĝ ı , Ǿ ' Ǿ	,	IEC 62061
Ǿ Ĥ η , Ǿ Ĥ '	1.29×10 ⁻⁵ /PTI=20	IEC 62061
¼ η Ĥ η , Ǿ Ĥ '	1.49×10 ⁻¹⁰ 1/h,	IEC 62061
ŷ Ĥ ı	0,	IEC 60204