
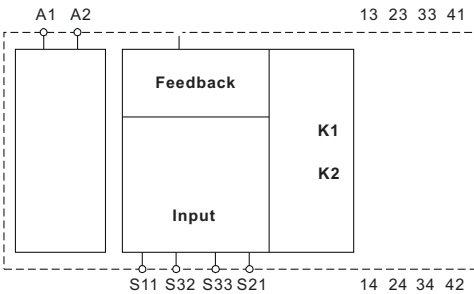


K	→ 简介		Ie = 1A 1 NO 7000000			
	K		B _{10d} 50%			
			→ 适用型号			
K	■ (EN 574 Type III C)		→ 功能框图			
	■ 0.5s					
	■ -					
→ 技术参数						
		24V AC/DC 0.85~1.1 50Hz~60Hz ≤1.5 W/24V DC ≤4.8 VA/24V AC				
		≤50mA/24V DC ≤15Ω (EN 574 Type III C)				
		3NO+1NC 2NO+2NC				
		AgSnO ₂ +0.2μmAu				
		AC-15 5A/230V DC-13 5A/24V 10A gL/gG (NO) 6A gL/gG (NC)				
数		≤30ms ≤15ms ≤250ms ≤500ms 20ms				
境 数		IEC/EN 60947 IEC 61326-3-1 IEC/EN 61000-6-2 IEC/EN 61000-6-4 250 V AC 6000V (1.2/50μs) 1500 V AC 1min IEC 60947-1 10Hz~55Hz 0.35mm III				
		NPFSR-K322D				
		→ 外形结构				
		× × : 23mm×100mm×115mm				

Nanjing New Power Electric Co., Ltd.


→ 应用示例

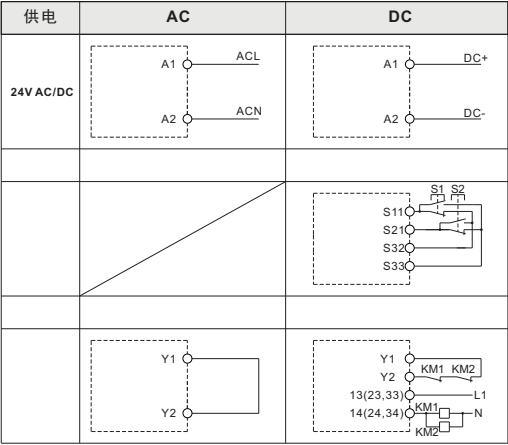

说明

- S1/S2 EN574 type IIIC
- KM1/KM2 IEC 60947

→ 功能描述

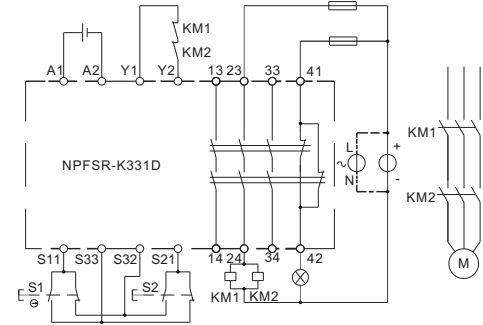

- “PWR”
- 0.5s S1 S2
- S1 S2


→ 安装

- DIN IEC 60715 35mm


○

A.


DIN




B.



C.



○

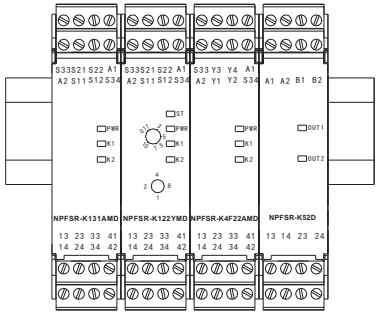

→ 面板显示

- PWR: ()
- K1: K1 () K1
- K2: K2 () K2

→ 注意事项

- IP20 ()

- IEC 60664-1 2

- IEC 61000-4

○

○

→ 补充说明

○