


NPWD-C18D.RTD


1 4 ~ 20 mA 1 RS-485

RS-485

PC

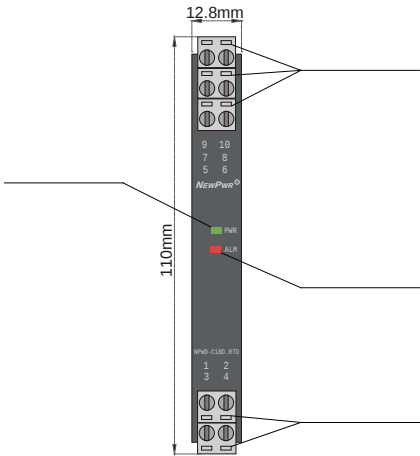

18V DC 60V DC
0.9W
Pt100 Cu100 Cu50 BA1 BA2
1 4 20mA
2 : RS485
RL

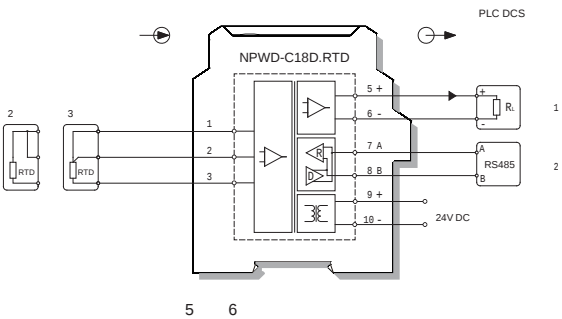

IEC 61326-3-1

-20 +60
-40 +80
12.8mm× 110mm× 117mm

110% 0mA~20mA
0mA 22mA

NPWD-C18D.RTD

PB
1

1	
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA

		/	
PT100	-200 +850	<100 , ±0.1	100 , ±0.1%F.S.
Cu50	-50 +150	<100 , ±0.1	100 , ±0.1%F.S.
Cu100	-50 +150	<100 , ±0.1	100 , ±0.1%F.S.